



(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
05.09.2001 Bulletin 2001/36

(51) Int Cl.7: **B25J 17/02, B25J 15/06**

(21) Application number: **01810201.2**

(22) Date of filing: **27.02.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Ehrat, Matthias**
8450 Andelfingen (CH)

(74) Representative: **Clerc, Natalia et al**
Isler & Pedrazzini AG
Postfach 6940
8023 Zürich (CH)


(30) Priority: **01.03.2000 EP 00104234**

(71) Applicant: **SIG Pack Systems AG**
8222 Beringen (CH)

(54) **Robot for handling products in a three-dimensional space**

(57) A robot for handling products in a three-dimensional space is described. The robot comprises a base (1) on which three arms (9) are pivotably supported to pivot around three pivot axes (3) arranged in a common axes plane (4). The three axes form a triangle with three corners. Each arm is mounted on a shaft (2) of a servo motor (6). All motors (6) are connected to a controller (8). Three connecting linkages (19) connect the free ends of the arms (9) to a carrier (22) which is movable in space in all three linear dimensions and prevented from rotation around all three rotative dimensions. A telescopic fourth linkage (43) connects a gripper (30) rotatably supported on the carrier (22) by two joints (42, 46) with a fourth servo motor (48) fixed to the base (1). In the axes plane (4) the base has an opening (52) through which the fourth linkage (43) extends. The upper joint (46) of the fourth linkage (43) is on an opposite side of the axes plane (4) than the carrier (22). By this measure the range that can be covered by the gripper can be substantially increased for a given arm length.

Fig. 1

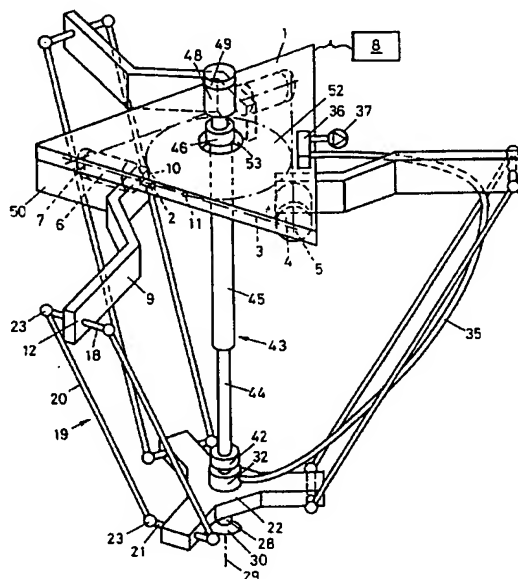

BEST AVAILABLE COPY

DescriptionRelated application

[0001] This patent application claims priority of EP patent application No. 00 104 234.0 filed March 1, 2000, the content of which is incorporated herein by reference.

Field and background of the invention

[0002] EP-B 250 470 describes a robot for handling products in a three-dimensional space according to the preamble of claim 1. Three arms are pivotably attached to a base. The three pivoting axes of the arms are arranged in a common plane and form a regular triangle. At the free end of each arm a parallelogram linkage is affixed which other end is connected to a common carrier. The carrier carries in its center a gripper for handling the products. The gripper is joined by a telescopic bar with a servo motor for turning it. The upper joint of that connection is below the axes plane.

Summary of the invention

[0003] The problem which the present invention solves is to increase the volume of space which can be reached by the gripper relative to the length of the arms or conversely to reduce the arm length for the same volume covered. This problem is solved by the invention in which, briefly stated, a robot for handling products in a three-dimensional space is described. The robot comprises a base on which three arms are pivotably supported to pivot around three pivot axes arranged in a common axes plane. The three axes form a triangle with three corners. Each arm is mounted on a shaft. Each shaft is connected to a driving unit, e.g. a pneumatic or electric motor with or without a gear unit. All driving units are connected to a controller. Three connecting linkages connect the free ends of the arms to a carrier which is movable in space in all three linear dimensions and prevented from rotation around all three rotative dimensions. A telescopic fourth linkage connects a gripper rotatably supported on the carrier by two joints with a fourth driving unit fixed to the base. In the axes plane the base has an opening through which the fourth linkage extends. The upper joint of the fourth linkage is significantly above the axis plane and on an opposite side of the axes plane than the carrier. No collision between the telescopic linkage and the other linkages can occur within the operating range.

[0004] By this measure the range that can be covered by the gripper can be substantially increased for a given arm length or the arm length can be reduced for a given range. This way either the range or the speed of the robot or both can be increased. Speed is a critical problem with handling robots because it is crucial to the production capacity of a manufacturing or packaging line in which the robot is used.

Brief description of the drawings

[0005] A preferred embodiment of the invention is hereinafter described with reference to the drawings, in which

Fig. 1 shows a perspective view of a robot,

Fig. 2 - 4 show sectional views of details of the robot, and

Fig. 5 and 6 show a further embodiment.

Detailed description of the preferred embodiment

[0006] On a common base 1 three shafts 2 are rotatably supported to pivot around three axes 3 arranged in an common plane 4 and forming a regular triangle with three corners 5. Each shaft 2 is connected to a servo motor 6 and a rotary encoder 7 which are both connected to a common controller 8. Each shaft 2 carries an arm 9. The connection 10 of each arm 9 to the shaft 2 is spaced from a middle point 11 of adjacent corners 5. The arms 9 are angled with respect to the axes 3 such that their free ends 12 are about in the central vertical plane of two corners 5.

[0007] At the free end 12 each arm 9 carries a cross bar 18 which is parallel to the respective axis 3. The two ends of the cross bar 18 are linked by a parallelogram linkage 19 to a carrier 22. The linkage 19 comprises the cross bar 18, two rods 20 of equal length, a connection 21 at the lower end to the carrier 22 and four joints 23 which are preferably ball joints but could also be cardan joints.

[0008] This way the three linkages 19 prevent rotation of the carrier 22 around axes in all three spacial dimensions. The carrier 22 can therefore only displace parallel to itself in response to movement of the arms 9. The controlled rotative movement of the arms 9 around their axes 3 is therefore translated into a linear displacement of the carrier 22.

[0009] At its center a gripper shaft 28 is rotatably supported in the carrier 22 to rotate around an axis 29 which is perpendicular to the axes plane 4. A gripper in the form of a suction cup 30 is fixed to the shaft 28 below the carrier 22. An axial boring 31 in the shaft 28 is connected to the underside of the cup 30 and to a radial boring 34 to a connecting ring 32. The ring 32 is fixed to the carrier and has a circumferential groove 33 which communicates with the radial boring 34 and with a flexible transmission line in the form of a tube 35 which is fixed to one of the bars 20 and the respective arm 9 and connected at its upper end to a pneumatic valve 36. The valve 36 is connected, on its pneumatic side, with a vacuum pump 37 and on its electric side with the controller 8.

[0010] The upper end of the shaft 28 is connected by a cardan joint 42 to a telescopic shaft 43 consisting of

two sections, namely an upper section 45 and a lower section 44. The sections 44, 45 are prismatic pipes or cylindrical pipes with non-circular cross section. The outside cross section of one of the pipes corresponds to the inside cross section of the other pipe so that they can slide relative to each other longitudinally but are rotatably fixed relative to each other. At the upper end the upper section 45 is connected by a further cardan joint 46 to the output shaft 47 of a further servo motor 48 and a rotary encoder 49.

[0011] As shown in Fig. 3, the motors 6, encoders 7 and part of the shafts 2 including their bearings 49 are enclosed by a liquid tight housing 50 with a seal 51 around the shaft 2. For clarity reasons only one of the housings 50 is shown in Fig. 1. In the illustrated embodiment the base 1 is a triangular plate arranged parallel to and above the axes plane 4. Because of the angled arms 9 and the spacing of the connection 10 from the middle point 11 the base 1, housings 50 and arms 9 leave a central open space or opening 52 in the axes plane 4 which extends at least to the axes 3. The telescopic shaft 43 extends through that opening 52 and through a further central opening 53 in the base 1 itself. The cardan joint 46 is above the base 1 and therefore also above the axes plane 4.

[0012] Because of the large spacing between the cardan joints 42 and 46 the two sections 44, 45 of the telescopic shaft 43 are considerably longer than the telescope of the prior art according to EP-B 250 470. Therefore, the volume of space within which the gripper 30 can be manipulated is considerably increased for a given length of the arms 9 or, conversely, for a given operating range the arm length can be reduced which means smaller masses to be accelerated, i.e. higher operating speed.

[0013] The telescopic shaft 43 composed of only two sections 44, 45 is preferred over a telescopic shaft of three or more sections for two reasons: telescopes with three sections need stroke limitation means between the middle section and each end section which leads to a complicated design and more mass to be accelerated in operation. Three or more section telescopes also have a higher rotational backlash.

[0014] If a high accuracy of the turning angle of the gripper is not required the cardan joints 42 and 46 can be replaced by short elastomer tubes. In this case the pneumatic connection between the valve 36 and the suction cup 30 can be led via the telescope shaft 43. Instead of the suction cup 30 other handling tools might be used, e.g. tongs which may also be actuated pneumatically via the tube 35 and a pneumatic cylinder on the carrier 22. The parallelogram linkage 19 can also be replaced by a single bar. In this case the joints at the lower and upper end of that bar must be cardan joints.

[0015] Fig. 4 shows a variant of the embodiment of Fig. 1 to 3, in which the arm 9 is Y-shaped and has shafts 2, 54 at both ends 10, 55 of its legs. The shaft 54 is supported in a separate bearing 56. In this variant the

arm 9 could also be V- or U-shaped. The figure shows the driving unit and the position feedback unit attached to shaft 2. It could also be that this driving unit is attached to shaft 54 or that both shafts 2 and 54 are driven with an interlinked driving unit.

[0016] In the embodiment according to Fig. 5 and 6 both bearings 49, 56 are part of the housing 50, which is V-shaped in plan view. The arm 9 is V-shaped and is attached to the shafts 2, 54 on the external side of the housing 50. A further V-shaped arm 60 is attached to the shafts 2, 54 inside the housing 50. At its tip the arm 60 is connected by a bearing 61 to a rack 62 which meshes with a pinion 63 driven by the servo motor 6. The plane of the arm 60 is inclined upwardly with respect to the plane of the arm 9. A spring loaded roller (not shown) forces the rack 62 into contact with the pinion 63 such that the rack-and-pinion reduction gear is backlash free.

Claims

1. A robot for handling products in a three-dimensional space, comprising
 - three arms that are pivotably supported by shafts on a common base to pivot around three pivot axes arranged in a common axes plane, the axes forming a triangle with three corners each pivot shaft being connected to a first to third driving unit, each driving unit being connected to a common controller;
 - a connecting first to third linkage connecting a free end of each arm to a carrier which is movable in space in all three linear dimensions and prevented from rotation around all three rotational dimensions;
 - a telescopic fourth linkage which at its one end is connected by a first joint to a fourth driving unit fixed to the base and at its other end by a second joint to a gripper rotatably supported in the carrier, **characterised in that**
 - in the axes plane the base has an opening through which the fourth linkage extends, and
 - that the first joint is on an opposite side of the axes plane than the carrier.
2. The robot of claim 1 further comprising a transmission line between the base and the gripper for actuating the gripper.
3. The robot of claim 1 in which all joints of the first to third linkages are cardan joints.
4. The robot of claim 1, wherein the first and second joints are cardan joints.
5. The robot of claim 1, wherein a cross section of the

opening extends at least to the side lines formed by the triangle of the axes.

6. The robot of claim 1, wherein a connection of each arm to its pivot axis is spaced from a middle point between adjacent corners of the triangle. 5
7. The robot of claim 2, wherein the connecting line comprises a pneumatic flexible tube connected to a pneumatic valve connected to the controller. 10
8. The robot of claim 7, wherein the gripper comprises a suction cup and the pneumatic valve is connected to a vacuum source. 15
9. The robot of claim 7, wherein both joints of the fourth linkage are formed by a flexible tube which can transmit rotary motion, and wherein the transmission line extends through the fourth linkage. 20
10. The robot of claim 1, wherein each first to third driving unit and each respective bearing of each respective shaft is surrounded by a liquid tight housing, the housing having a liquid-tight seal around the respective shaft between the respective bearing and a connection of the shaft with the respective arm. 25

30

35

40

45

50

55

Fig. 1

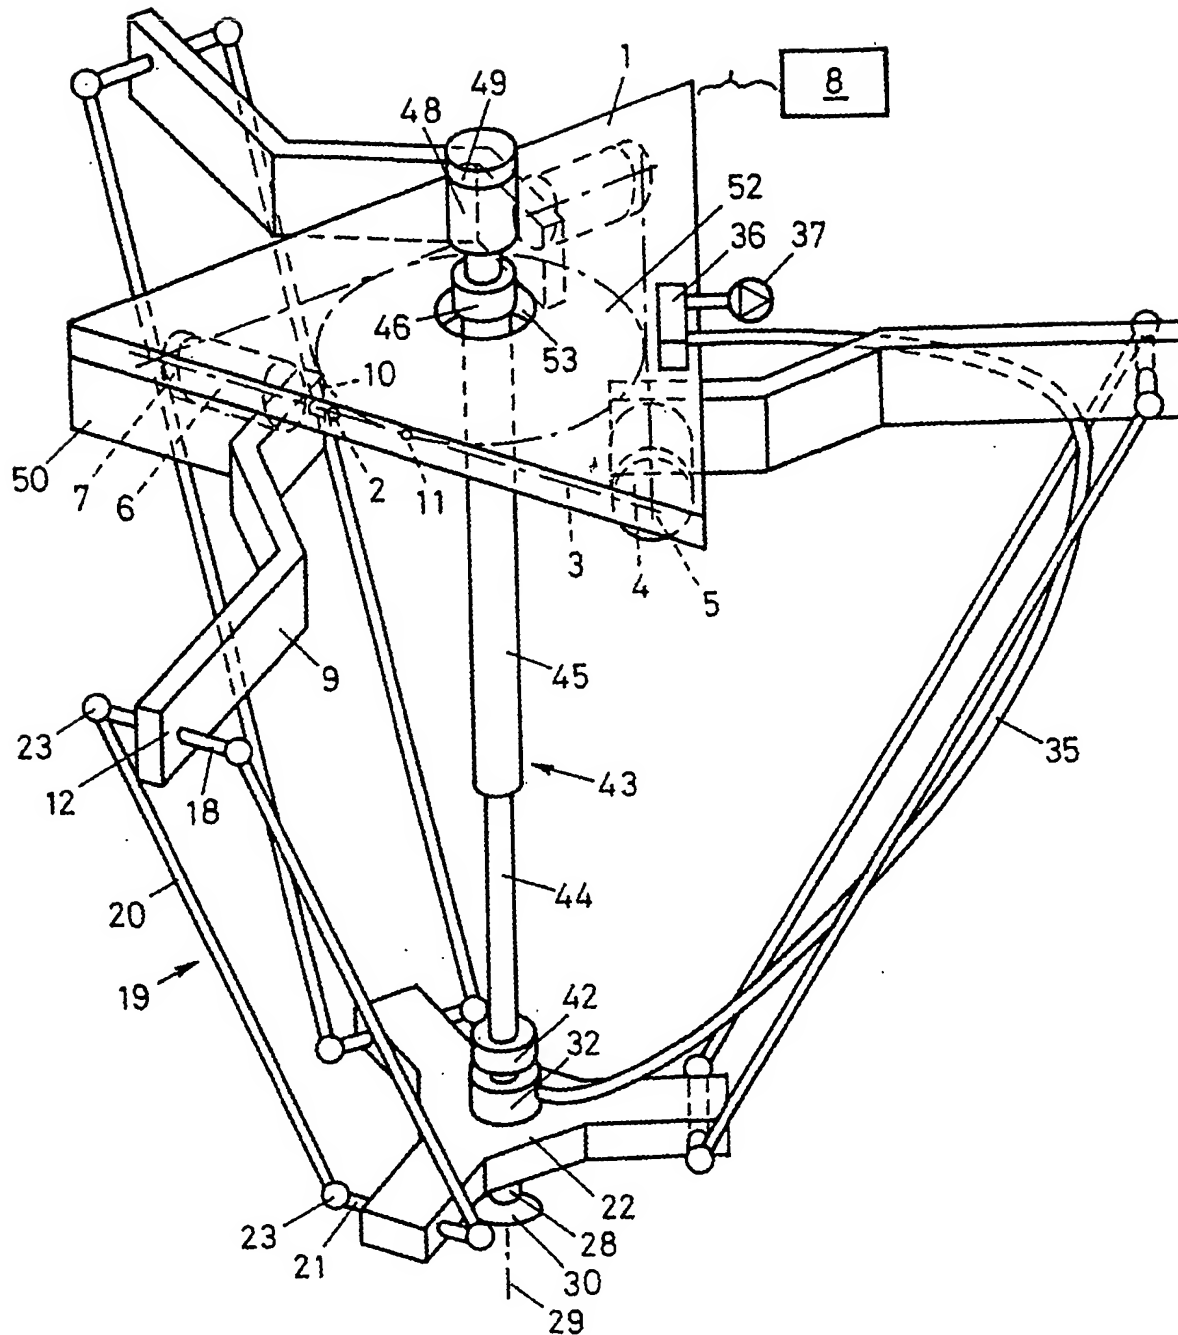


Fig. 2

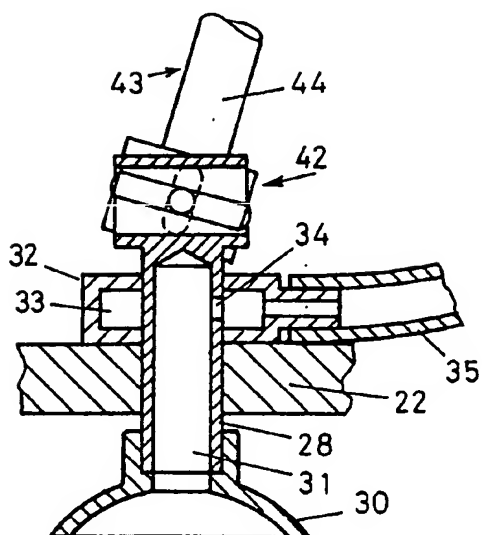


Fig. 3

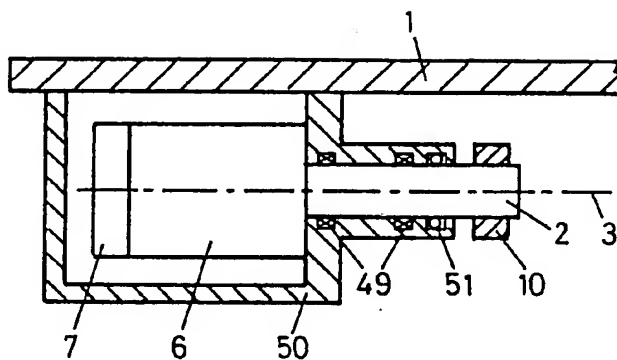


Fig. 4

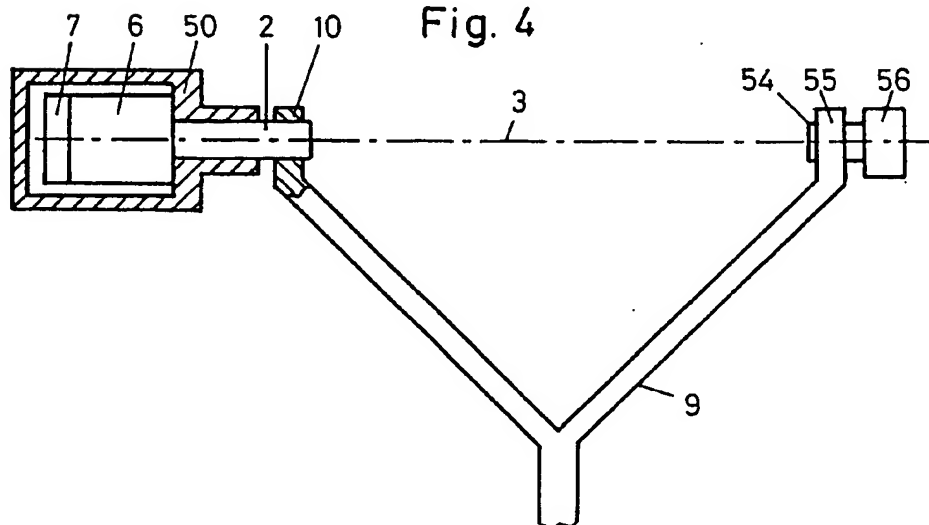


Fig. 5


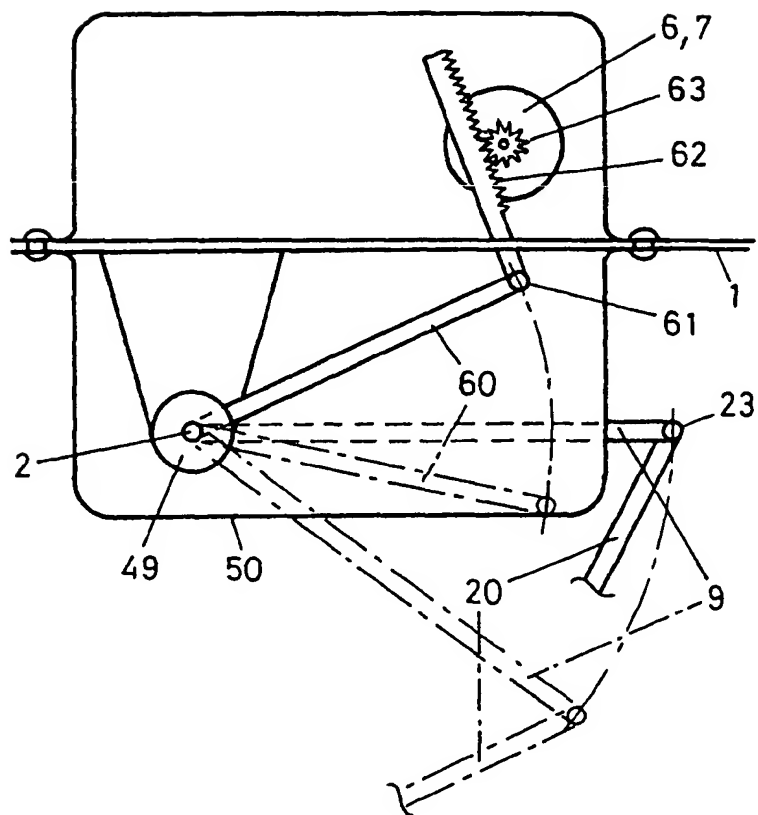


Fig. 6



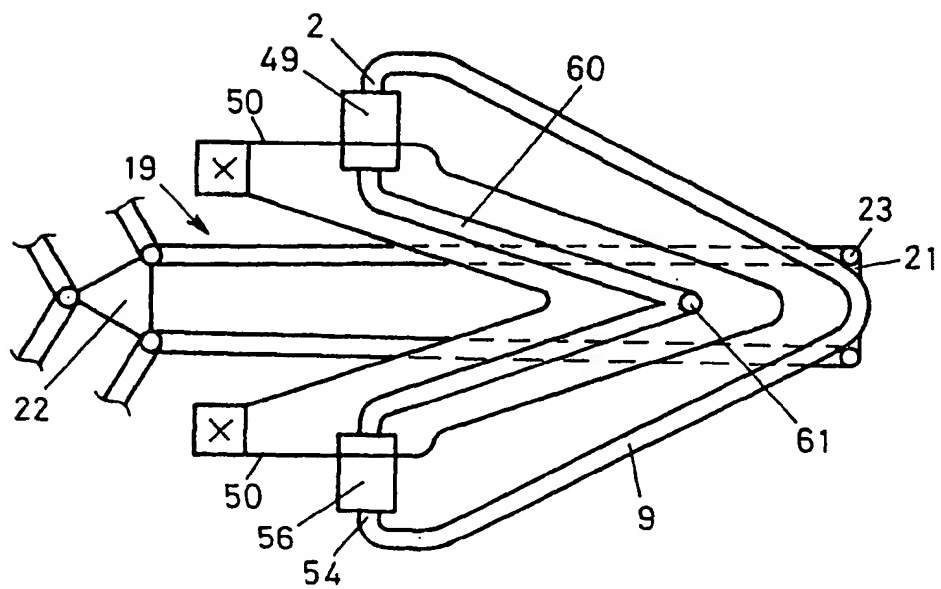

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 81 0201

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A,D	US 4 976 582 A (CLAVEL REYMOND) 11 December 1990 (1990-12-11) * abstract; figure 1 * * column 3, line 46 - column 4, line 7 * ---	1,3,4	B25J17/02 B25J15/06
A	FR 2 647 763 A (THIBAUT JACQUES) 7 December 1990 (1990-12-07) * figure 2 * * page 3, line 25 - line 27 * * page 6, line 13 - line 27 * ---	1,2,7,8	
A	FR 2 672 836 A (ONERA (FR)) 21 August 1992 (1992-08-21) * figures 2,5 * * page 9, line 14 - line 33 * * page 11, line 15 - line 27 * ---	1,3,4	
A	WO 99 67066 A (NEUMANN KARL ERIK; NEOS ROBOTICS AB (SE)) 29 December 1999 (1999-12-29) * figures 1-3 * * page 3, line 34 - page 4, line 18 * * page 5, line 4 - line 19 * -----	1,3,4	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B25J B23Q
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 11 June 2001	Examiner Lumineau, S
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 81 0201

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-06-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4976582 A	11-12-1990	CH 672089 A	31-10-1989
		AT 65200 T	15-08-1991
		CA 1298806 A	14-04-1992
		WO 8703528 A	18-06-1987
		DE 3680334 D	22-08-1991
		EP 0250470 A	07-01-1988
		JP 4045310 B	24-07-1992
		JP 63501860 T	28-07-1988
FR 2647763 A	07-12-1990	NONE	
FR 2672836 A	21-08-1992	NONE	
WO 9967066 A	29-12-1999	SE 512338 C	28-02-2000
		AU 4941799 A	10-01-2000
		BR 9906559 A	15-08-2000
		CN 1273546 T	15-11-2000
		EP 1007294 A	14-06-2000
		SE 9802268 A	26-12-1999

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.